




52QT ALL PURPOSE ALUMINUM BASKET POT AND GAS BURNER

ITEM: 99905

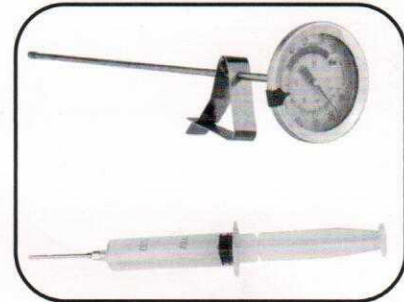

OWNER'S MANUAL AND SAFETY INSTRUCTIONS

SAVE THIS MANUAL: KEEP THIS MANUAL FOR SAFETY WARNINGS, PRECAUTIONS, ASSEMBLY, OPERATING, INSPECTION, MAINTENANCE AND CLEANING PROCEDURES. WRITE THE PRODUCT'S SERIAL NUMBER ON THE BACK OF THE MANUAL NEAR THE ASSEMBLY DIAGRAM (OR MONTH AND YEAR OF PURCHASE IF PRODUCT HAS NO NUMBER)

FOR QUESTIONS PLEASE CALL OUR CUSTOMER SUPPORT: 909.628.0880 MON-FRI 9AM TO 3PM PST

IMPORTANT SAFETY INFORMATION

WARNING

GENERAL SAFETY WARNINGS

Read all safety warnings and instructions. Failure to follow the warnings and instructions may result in electric fire and/or serious injury. Save all warnings and instructions for future reference.

SAFETY

The warnings, precautions, and instructions discussed in this instruction manual cannot cover all possible conditions and situations that may occur. It must be understood by the operator that common sense and caution are factors which cannot be built into this product, but must be supplied by the operator. Read carefully and understand all **ASSEMBLY AND OPERATION INSTRUCTIONS** before operating. Failure to follow the safety rules and other basic safety precautions may result in serious personal injury.

- **Read and understand all instructions.** Failure to follow all instructions may result in serious injury or property damage.
- **DO NOT** allow any person to operate or assemble the product until they have read this manual and have developed a thorough understanding of how it works.
- **DO NOT modify this product in any way.** Unauthorized modification may impair the function and/or safety and could affect the lift of the product. There are specific applications for which the product was designed.
- **NEVER** operate this appliance unattended.
- **NEVER** operate this appliance within 10 ft (3 m) of any structure, combustible material or other gas cylinder.
- **NEVER** operate this appliance within 25 ft (7.5 m) of any flammable liquid.
- **DO NOT** leave this appliance unattended while in use. The user must remain in the immediate area of the product and have a clear view of the product at all times during operation.
- Keep children and pets away from burners at all times.
- For use with a 20lb Propane Tank only, not for use with natural gas or other gas source. Any alternations may cause severe injury or even death.
- This product is not intended for commercial use.
- In case there is a fire, call the local fire department or dial 911. Stay clear from flames. **DO NOT** attempt to extinguish an oil or grease first with water.
- Use only accessories, such as cooking vessels recommended by the manufacturer, to allow safe and proper performance of the product. Never use a cooking vessel larger than the capacity and diameter recommended by the manufacturer.
- For **OUTDOOR** use only. **DO NOT** use in a building, garage or any other enclosed area. **DO NOT** use in or on recreational vehicles or boats. **NEVER** use this appliance as a heater.

IMPORTANT SAFETY INFORMATION

- **DO NOT** operate appliance under ANY overhead construction. Keep a minimum clearance of 10 feet (3 m) from the sides, front and back of appliance to ANY construction. Keep the area clear of all combustible material and flammable liquids, including wood, dry plants and grass, brush, paper, and canvas.
- Use **ONLY** on a level, stable non-combustible surface like bricks, concrete or dirt. **DO NOT** use this appliance on any surface that will burn or melt like wood, asphalt, vinyl, or plastic.
- Keep the fuel supply hose away from any heated surfaces.
- To prevent accidental fires, before using the appliance ensure that the hose is not damaged and all joints and connections are not leaking by turning on the cylinder valve, leave the burner valve closed, and apply a soapy solution to the joints and connections. If a continuous hissing sound is heard, or if the soapy solution bubbles, there is a leak. **DO NOT** use the appliance if there is a leak. Replace the faulty parts.
- Extinguish all open flames before connection the gas supply to the appliance and before checking for leaks.
- Use appliance only with LP (propane) gas and the regulator/valve assembly supplied. Installation must conform with local codes, or in their absence with National Fuel Gas Code, NFPA 54/ANSI Z223.1. Handling and storage of LP cylinders must conform to LP Gas Code NFPA/ANSI 58. Appliance is not for use in or on recreational vehicle and/or boats.
- Before opening LP tank valve, check the coupling nut for tightness. When appliance is not in use, turn off control knob and LP tank valve on supply cylinder.
- **NEVER** use LP tank if visibly rusted, damaged, or out of date.
- If you notice grease or other hot material dripping from appliance onto valve, hose or regulator, turn off gas supply at once. Determine the cause, correct, clean and inspect valve, hose and regulator before continuing. Perform a leak test.
- Clean and inspect the hose before each use of the appliance. If there is evidence of abrasion, wear, cuts or leaks, the hose must be replaced prior to the appliance being put into operation. See product sheet for hose & regulator information.
- **DO NOT** block hoses in bottom or sides of appliance.
- **ALWAYS** close LP tank valve and remove coupling nut before moving LP tank from specified operating position.
- **NEVER** store a spare LP tank under or near appliance or in enclosed areas. **NEVER** fill the cylinder beyond 80% full. An overfilled spare LP tank is hazardous due to possible gas released from the safety relief valve. Failure to follow these instructions exactly could cause a fire resulting in death or serious injury.
- If you see, smell, or hear escaping gas, immediately get away from the LP tank/appliance and call your fire department.
- Combustion by-products produces when using this product contain chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.
- Turn **OFF** all control knobs and LP tank valve. Turn coupling nut counter-clockwise by hand only. **DO NOT** use tools to disconnect. Install safety cap onto LP tank valve. **ALWAYS** use cap and strap supplied with valve. Failure to use safety cap as directed may result in serious personal injury and/or property.

IMPORTANT SAFETY INFORMATION


- A disconnected LP tank in storage or being transported must have a safety cap installed(as shown). **DO NOT** store an LP tank in enclosed spaces such as a carport garage, porch, covered patio or other building. **NEVER** leave an LP tank inside a vehicle, which may become overheated by the sun.
- Storage of an appliance indoors is permissible only if the cylinder is disconnected and removed from the appliance.
- The LP tank used with your appliance must meet the following requirements: Purchase LP tanks only with these required measurements: 12"(30.5cm) (diameter) x 18"(45.7cm) (tall) with 20lb. (9 kg.) capacity maximum. Be constructed and marked in accordance with specifications for LP tank of the U.S. Department of Transportation (DOT) or the National Standard of Canada, CAN/CSA-B339, Cylinders, Spheres and Tubes for the Transportation of Dangerous Goods. The propane cylinder used with this appliance must include a collar to protect the cylinder valve.
- LP Tank valve must have: Type 1 outlet compatible with regulator or appliance. Safety relief valve. * UL listed Overfill Protection Device(OPD). This OPD safety features is identified by a unique triangular hand wheel. Use only tanks equipped with this type of valve. LP tank must be arranged for vapor withdrawal.
- LP Gas is non-toxic, odorless and colorless when produced. For your safety, LP gas has an odor (similar to rotten cabbage) so that it can be smelled.
- LP gas is highly flammable and may ignite unexpectedly when mixed with air.
- Leak test must be repeated each time LP tank is exchanged or refilled. **DO NOT** smoke during leak test. **DO NOT** use an open flame to check for gas leaks.
- Appliance must be leak checked outdoors in well-ventilated area, away from ignition sources such as gas fired or electrical appliances. During leak test, keep appliance away from open flames or sparks.
- Use a clean paintbrush and 50/50 soap and water solution. Use mild soap and water. **DO NOT** use household cleaning agents. Damage to gas train components can result. Brush soapy solution onto all weld seams and entire valve area.
- **NEVER** use a stove of any kind to heat your home.
- **NEVER** attempt to move the fryer while it is lit. Turn off and disconnect propane prior to moving. Failure to do so may cause a leak in the connections and could easily cause a fire or explosion with future use.
- **DISCONTINUE USE IF THERE IS ANY SIGNS OF DAMAGE OR WEARING THAT MAY BE UNSAFE.** Including but not limited to wearing on the regulator or hose, wearing or damage to plate support, damage or loose wheels/base.



SAVE THESE WARNINGS

PRODUCT INFORMATION

52QT ALL PURPOSE ALUMINUM BASKET POT AND GAS BURNER

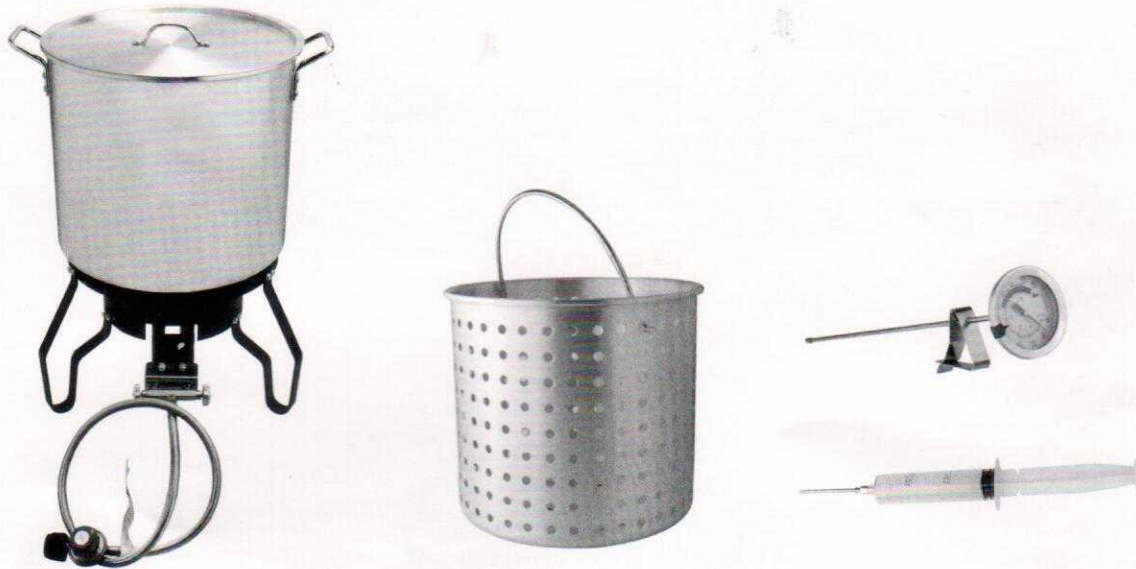

FEATURES

- Includes long probe thermometer measures from 50-500 degrees Fahrenheit
- Includes marinade injector allows you to impart your signature flavors
- This kit features a round, black painted iron stand to make sure the hot contents stay inside
- Adjustable 20PSI Gas Regulator pressure
- Portable and lightweight for outdoor cooking and frying
- Primary Material: Aluminum, Iron
- Propane Fuel: LPG
- Ignition Type: Manual
- Certification: CSA
- 52QT capacity frying pot

PARTS INFORMATION



52QT FRYING BASKET

52QT FRYING POT

TOP RING

BURNER

HOLDERS

CONNECTOR



HOSE & REGULATOR




THERMOMETER




MARINADE NJECTOR

ASSEMBLY INSTRUCTION

52QT Aluminum Pot With Basket H5212S

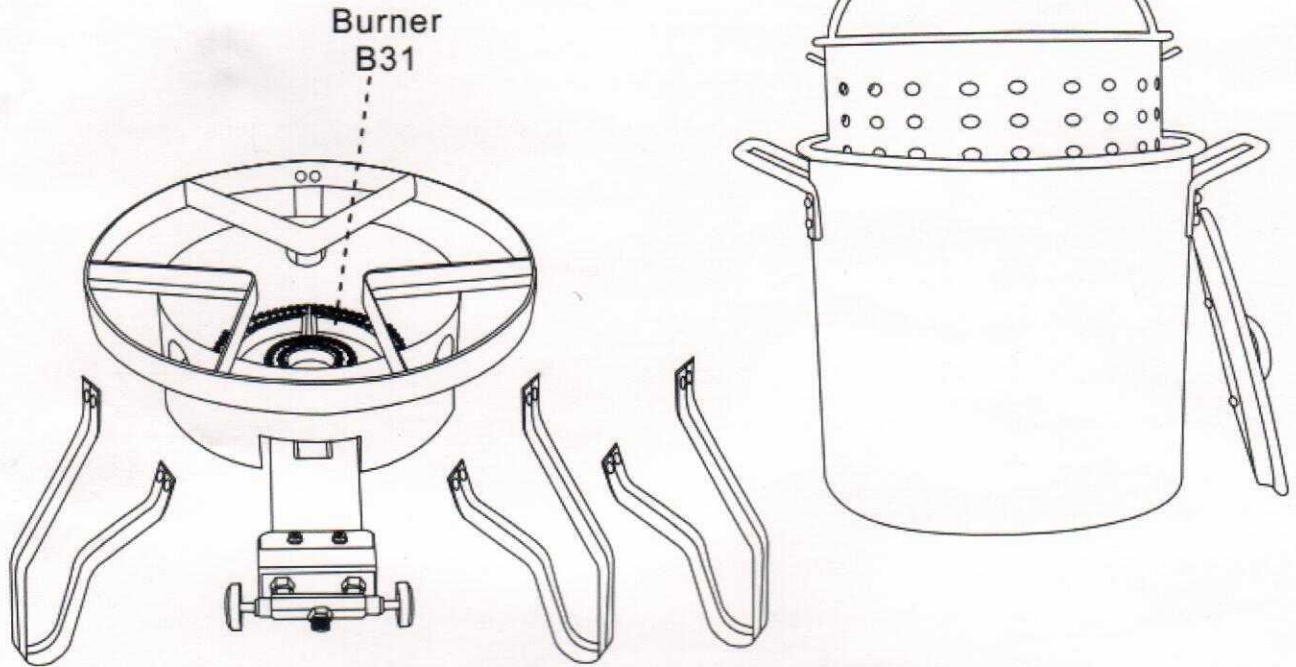


Install Tool



Install Tool



Screw

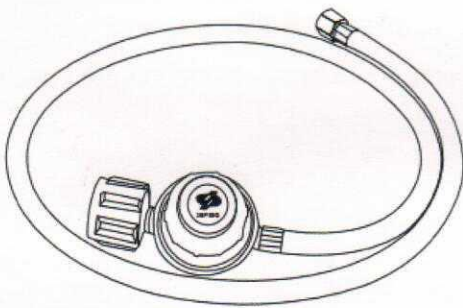

Regulator & Hose



Fire Lighter
(Not included)

OPERATION

1 PREPARATION BEFORE USING

Step 1: Place stove on a level and stable surface.

Step 2 Make sure there is propane in the tank and it is turned **OFF**, connect propane tank and stove with regulator and hose.

2 GAS LEAK TESTING

Step 1: Slowly open the propane tank valve and check for leaks by applying small amount of liquid soap and look for bubbles. If you smell gas, **TURN OFF** the propane valve immediately.

Step 2: Detach and reconnect the regulator on the tank and test it again, if leaking continues, stop using and contact retailer/distributor for help.

Step 3: If no gas is detected, please follow Part Three OPERATION.

3 OPERATION

Step 1: Hold a fire lighter near the burner (**Picture 2**).

Step 2: Open regulator valve slowly (**picture 3 to the "ON" direction**).

Step 3: Start with the minimum fire and slowly adjust the regulator valve until burner has blue flame, some yellow tips on the flame is normal.

Step 4: Place the Aluminum Frying pot on the burner (**Picture 4**), and you can enjoy delicious crawfish, Turkey, lobster etc...

4 ATTENTION

Notice 1: The gas tank should be at least **1.0M** away from gas stove during use.

Notice 2: **DO NOT** move the gas stove or propane tank during use.

Notice 3: After use, let it cool for **20 minutes** before disassembling, storage, transport, cleaning.

5 CLEANING

1. Allow burner, stockpot and basket, to cool completely.

2. Turn regulator (**Picture 3**) to the OFF/CLOSE position, remove propane hose from tank and stove.

3. Clean the Aluminum stockpot, basket, cast iron burner thoroughly with soapy water and dry them with dry and soft cloth.


4. When not in use, store the product in a place which is dry and out of direct sunlight.



Picture 1



Picture 2



Picture 3





Picture 4



WARNING



- Not for use in home or any other enclosed area including a garage. Only for open air/space use.
- Never use a stove of any kind to heat your home.
- Keep any spare propane tanks AWAY from this or any other heat source.
- For use with a 20lb Propane Tank only, not for use with natural gas or other gas source. Any alterations may cause severe injury or even death.
- Check with your local fire safety department if you have any questions on safe usage.
- If you ever smell gas immediately shut off gas to the appliance, put out any flame and re test for gas leak per STEP 2 under Instructions.
- Not for use by children, please watch if children are present as the surfaces can become very hot on all sides. **DO NOT TOUCH** any hot surfaces or where heat may be present.
- **DISCONTINUE USE IF THERE IS ANY SIGNS OF DAMAGE OR WEARING THAT MAY BE UNSAFE**, Including but not limited to wearing on the regulator or hose, wearing or damage to plate support, damage or loose wheels/base.

	CARBON MONOXIDE HAZARD
	<p>Never use this product in an enclosed space.</p> <p>This appliance can produce carbon monoxide which has no odor. It may seriously danger you or others, including property.</p>

PLEASE READ THE FOLLOWING CAREFULLY

THE MANUFACTURER AND/OR DISTRIBUTOR HAS PROVIDED THE PARTS LIST AND ASSEMBLY DIAGRAM IN THIS MANUAL AS A REFERENCE TOOL ONLY. NEITHER THE MANUFACTURER OR DISTRIBUTOR MAKES ANY REPRESENTATION OR WARRANTY OF ANY KIND TO THE BUYER THAT HE OR SHE IS QUALIFIED TO MAKE ANY REPAIRS TO THE PRODUCT, OR THAT HE OR SHE IS QUALIFIED TO REPLACE ANY PARTS OF THE PRODUCT. IN FACT, THE MANUFACTUREER AND/OR DISTRIBUTOR EXPRESSLY STATES THAT ALL REPAIRS AND PARTS REPLACEMENTS SHOULD BE UNDERTAKEN BY CERTIFIED AND LICENSED TECHNICIANS, AND NOT BY THE BUYER. THE BUYER ASSUMES ALL RISK AND LIABILITY ARISING OUT OF HIS OR HER REPAIRS TO THE ORIGINAL PRODUCT OR REPLACEMENT PARTS THERETO, OR ARISING OUT OF HIS OR HER INSTALLATION OF REPLACEMENT PARTS THERETO.

Record Product's Serial Number Here: _____

Note: If product has no serial number, record month and year of purchase instead.

Note: Some parts are listed and shown for illustration purposes only and are not available individually as replacement parts.

Questions, problems, missing parts?



Before returning to your retailer, our exceptional customer service is here to help.

Call Us: 909.628.0880

Email Us: customer@bartonliving.com

Hours of Operation: 9am - 4pm (Monday - Friday)