



## ABOVE GROUND INCLINE POOL LADDER

ITEM # 75129



### OWNER'S MANUAL AND SAFETY INSTRUCTIONS


SAVE THIS MANUAL: KEEP THIS MANUAL FOR SAFETY WARNINGS, PRECAUTIONS, ASSEMBLY, OPERATING, INSPECTION, MAINTENANCE AND CLEANING PROCEDURES. WRITE THE PRODUCT'S SERIAL NUMBER ON THE BACK OF THE MANUAL NEAR THE ASSEMBLY DIAGRAM (OR MONTH AND YEAR OF PURCHASE IF PRODUCT HAS NO NUMBER).

FOR QUESTIONS PLEASE CALL OUR CUSTOMER SUPPORT: (909) 628 0880 MON-FRI 9AM TO 3PM PST



# SAFETY WARNINGS

The A-Frame external ladder adopts a blow molding process and polyethylene material, which has a strong corrosion resistance features. The entire ladder has been polished to ensure a smooth surface. The treads has round embodiments which effectively prevents slipping. Reinforced thick material assures safety, stability, and durability. This external ladder must to be installed on the tread of Item 75136. The external ladder is designed to be swung up, and suitable for above-ground pool with max height of 54". When the swimming pool is not in use, the external ladder can be swung up and fixed to prevent children from accidentally entering.

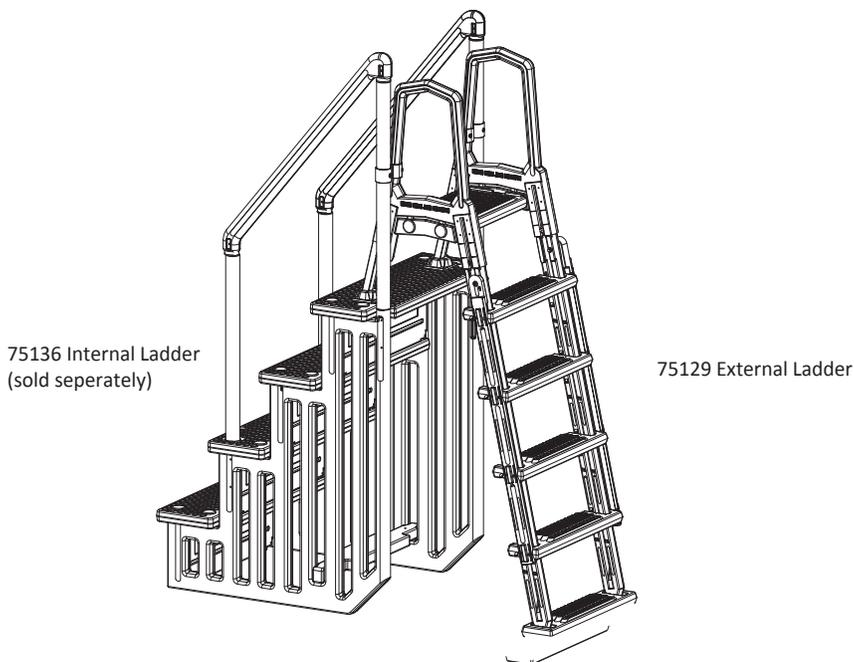


## Warning and Cautions

- Locate ladder on a solid base.
- One person on the ladder at a time.
- Ladder **MUST** be installed and used per manufacturer's instructions.
- Face ladder when entering and leaving pool. **DANGER:** No Jumping or Diving from ladder.
- Do not let children play with the ladder
- In order to avoid injury during the installation and handling of heavy objects, it is recommended to carry them together by two people.
- To prevent entrapment or drowning **DO NOT** swim through, behind or around ladder. **DO NOT** install the ladder at the suction point.
- Weight limit - **250 lbs maximum Warning:** Exceeding the maximum weight restriction may cause the ladder to fail.
- When ladder is not in use, lock up outer treads


# ASSEMBLY INFORMATION

1. Remove the A-Frame ladder and its accessories from the box and check whether all the accessories are complete.


2. First place the bottom tread on a flat surface with the grooved side facing up; then snap the two holders into the groove. Note: The two holders need to be snapped into the groove in the same direction.

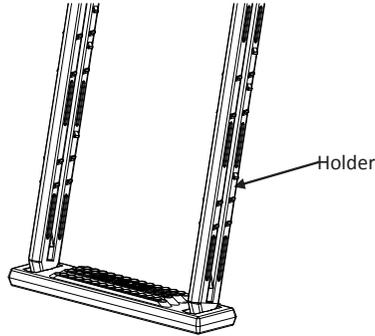

3. Install four treads to the holder, see the picture as below. Fix the top tread to the holder by #10 x 1-1/4 screws.

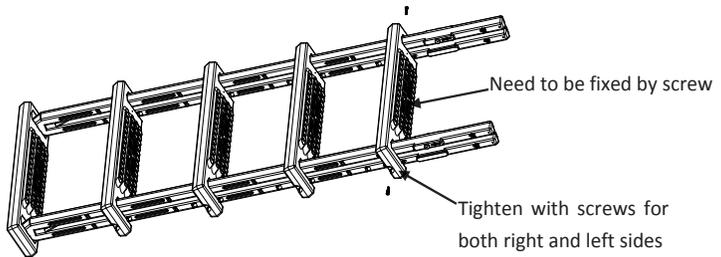


4. Fix the left and right fixing strips with bolt & gasket (M6), and nut M6\*85. Do not over-tighten

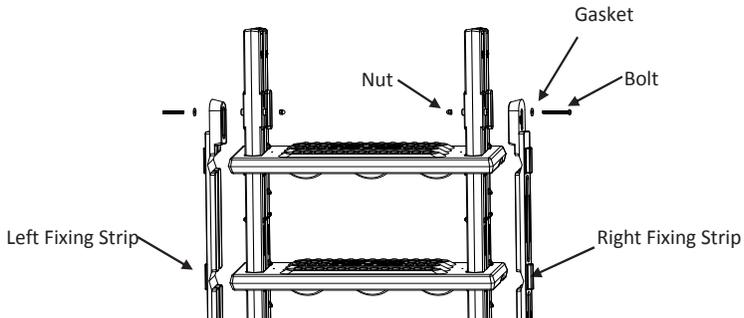


# ASSEMBLY INFORMATION

5. Use # 10x1-1 / 4 screws to fix other three treads. Then put aside for later.

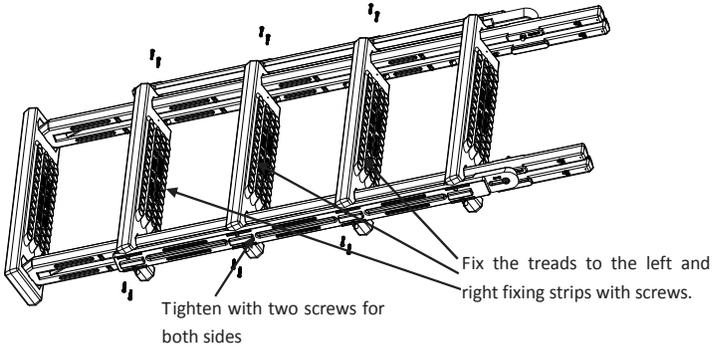


6. Assemble handrails to the platform, center cover cap opening on side of handrail where platform was just attached. Using a rubber mallet/hammer, tap on cap until the cap is flush with handrail.

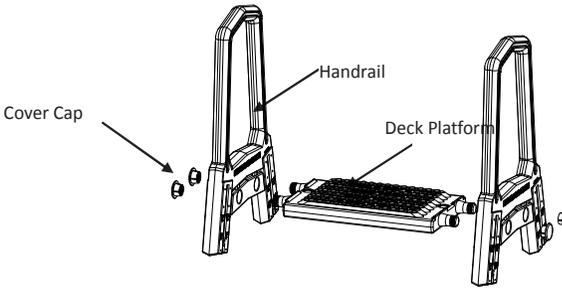


7. Attach handrails by pushing them down over the holders.

8. Secure handrails to the legs with #10 1-1/4 screws

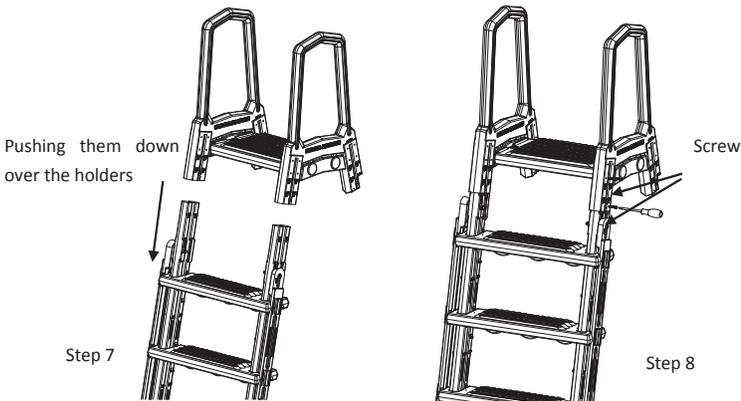


# ASSEMBLY INFORMATION


9. Slip mounting block all the way down over the nubs on the tube.

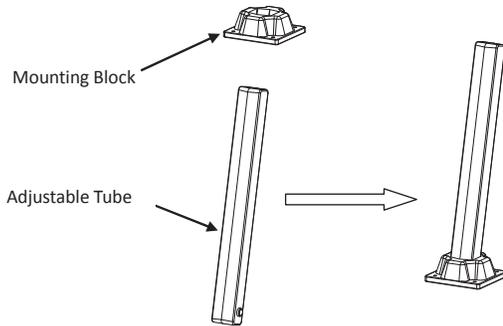

10. Fix the adjustable tube sets to the deck platform handrail with 10x1-1/4#

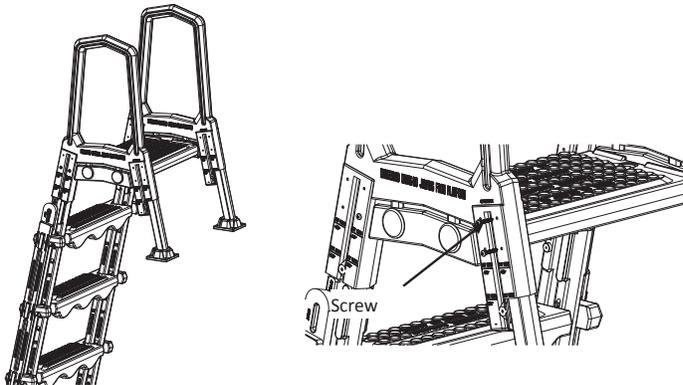


11. Put the connector to the handrails of the 75136 internal ladder

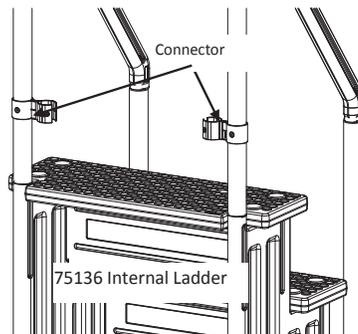


12. Fix the assembly to the top tread of the A Frame 75136, fix the connector by

# ASSEMBLY INFORMATION

#10x1-1/4 screw as well.

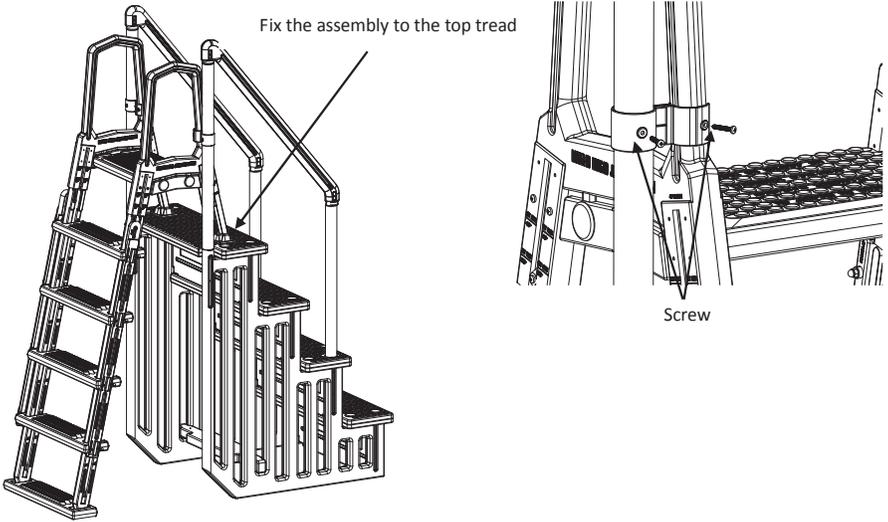


13. Fix the mounting block to the top tread by #10x1-1/4 screws

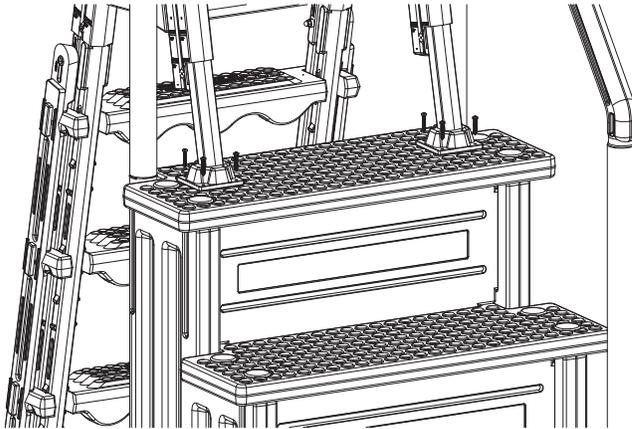

## Routine Maintenance

When the swimming pool is not in use, it is recommended to flip the outer ladder upwards, then push it down and fix it.

# PRODUCT INFORMATION

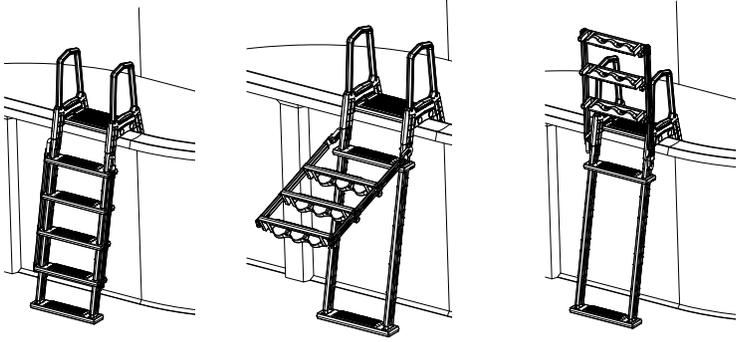

## Winterization


1. In winter, the ladder must be removed.
2. When removing the ladder, it is recommended to wash the ladder with fresh water to remove the chemicals on the surface.
3. Store the ladder in a warm and dry place for reuse in the next year.

## 4. Parameter List

No.	Description	Specification
1	Application	Max 54" height above ground pool
2	Weight limit	250 lbs
3	Material	Polythene
4	Products Size	32.5*25.5*77.5 IN
5	Package Size	22.5*7*59 IN

# PRODUCT INFORMATION

## 5. Product Explosion Diagram and Accessories

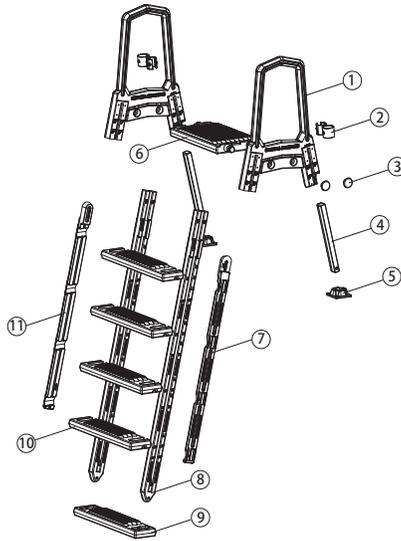

No.	Part Number	Description	Qty
1	7155001	Handrail	2
2	47155012	Connector	2
3	48850112	Cover Cap	5
4	48850202	Tube	2
5	48850201	Mounting Block	2
6	47155011	Deck Platform	1
7	47155007	Right Fixing Strip	1
8	47155005	Holder	2
9	47155008	Bottom Tread	1
10	47155002	Tread	4
11	47155006	Left Fixing Strip	1

# DISCLAIMER

## PLEASE READ THE FOLLOWING CAREFULLY

THE MANUFACTURER AND/OR DISTRIBUTOR HAS PROVIDED THE PARTS LIST AND ASSEMBLY DIAGRAM IN THIS MANUAL AS A REFERENCE TOOL ONLY. NEITHER THE MANUFACTURER OR DISTRIBUTOR MAKES ANY REPRESENTATION OR WARRANTY OF ANY KIND TO THE BUYER THAT HE OR SHE IS QUALIFIED TO MAKE ANY REPAIRS TO THE PRODUCT, OR THAT HE OR SHE IS QUALIFIED TO REPLACE ANY PARTS OF THE PRODUCT. IN FACT, THE MANUFACTURER AND/OR DISTRIBUTOR EXPRESSLY STATES THAT ALL REPAIRS AND PARTS REPLACEMENTS SHOULD BE UNDERTAKEN BY CERTIFIED AND LICENSED TECHNICIANS, AND NOT BY THE BUYER. THE BUYER ASSUMES ALL RISK AND LIABILITY ARISING OUT OF HIS OR HER REPAIRS TO THE ORIGINAL PRODUCT OR REPLACEMENT PARTS THERETO, OR ARISING OUT OF HIS OR HER INSTALLATION OF REPLACEMENT PARTS THERETO.

**Record Product's Serial Number Here:** \_\_\_\_\_

**Note: If product has no serial number, record month and year of purchase instead.**

**Note: Some parts are listed and shown for illustration purposes only and are not available individually as replacement parts.**

The material in this manual is for informational purposes only. The product(s) it describes are subject to change without prior notice, due to the manufacturer's continuous development program. XtremePowerUS makes no representations or warranties with respect to this manual or with respect to the products described herein. XtremePowerUS shall not be liable for any damages, losses, costs or expenses, direct, indirect or incidental, consequential or special, arising out of, or related to the use of this material or the products described herein.

## Questions, issues or missing parts?

Before returning to your retailer, our customer service team is here to help.



**Call Us: 909.628.0880**

**Email Us: [customer@xtremepowerusa.com](mailto:customer@xtremepowerusa.com)**

**Hours of Operation: 9am - 3pm PST Monday - Friday**

**MADE IN CHINA**